


# CONIX DUO - Dimensional Catalogue

TERMINALS

## JI 060: TAPERED TERMINAL

Element designed to free evacuate the smoke to the outside atmosphere




Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)	95	90	107	107	107	140	140	140	165	168	168	168	168	168			

P <sub>60</sub> (kg)	(0,3)	(0,4)	(0,5)	(0,6)	(0,9)	(1,0)	(1,3)	(1,9)	(2,3)	(3,0)	(3,4)	(3,7)	(4,1)	(6,0)			
----------------------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	--	--	--

TERMINALS

## JH 060: TAPERED TERMINAL

Element used to free evacuate the flue to the outside atmosphere




Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)								444	444	444	444	444	444	444	444	444	444

P <sub>60</sub> (kg)								(5,3)	(6,1)	(7,3)	(8,2)	(9,1)	(9,9)	(14,4)	(21,6)	(24,5)	(27,3)
----------------------	--	--	--	--	--	--	--	-------	-------	-------	-------	-------	-------	--------	--------	--------	--------

TERMINALS

## JI 160: OPEN TERMINAL

Element designed to free evacuate the smoke to the outside atmosphere



Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)	26	26	26	26	26	26	26	26	26	26	26	26	26	26			


P <sub>160</sub> (kg)	(0,2)	(0,3)	(0,3)	(0,4)	(0,5)	(0,5)	(0,6)	(0,9)	(1,0)	(1,2)	(1,4)	(1,5)	(1,7)	(2,3)			
-----------------------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	--	--	--

TERMINALS

## JI 061: ANTI-BACKFLOW TERMINAL

\*with locking clamp (cod.50)

Element designed to secure a correct evacuation of the smoke also in presence of wind

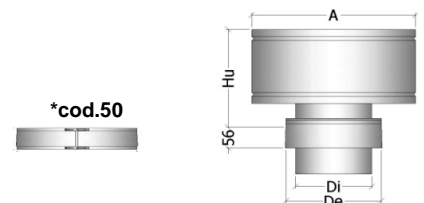


Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)	180	190	230	240	260	270	300	370	410	440	450	475	510	550			
A (mm)	200	230	300	360	410	430	490	560	610	690	780	860	900	980			

P <sub>61</sub> (kg)	(0,8)	(0,9)	(1,5)	(1,8)	(2,3)	(2,7)	(3,4)	(4,9)	(6,3)	(7,8)	(9,0)	(10,4)	(11,7)	(16,3)			
----------------------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	--------	--------	--------	--	--	--

# CONIX DUO - Dimensional Catalogue

## JI 062: RAIN CAP

Element designed to avoid that the snow and the rain water come inside the chimney




Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)	69	79	94	104	119	129	154	179	204	229	254	279	304	329			
A (mm)	180	200	280	300	330	350	450	500	600	630	720	810	900	930			

P <sub>62</sub> (kg)	(0,7)	(0,8)	(1,1)	(1,2)	(1,5)	(1,7)	(2,3)	(2,9)	(3,6)	(4,2)	(4,7)	(5,6)	(6,2)	(7,5)			
----------------------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	--	--	--

## JI 063: VENICE TERMINAL (with locking clamp)

\*with locking clamp (cod.50)

Good looking terminal designed to secure a correct evacuation of the smoke also in presence of wind

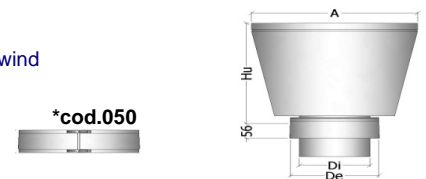


Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)			384	404	434	454	534	614	734								
A (mm)			385	405	445	475	535	615	695								

P <sub>63</sub> (kg)			(1,7)	(2,0)	(2,4)	(3,1)	(4,1)	(5,4)	(8,1)								
----------------------	--	--	-------	-------	-------	-------	-------	-------	-------	--	--	--	--	--	--	--	--

## JI 065: LAMELLAR TERMINAL (with locking clamp)

\*with locking clamp (cod.50)

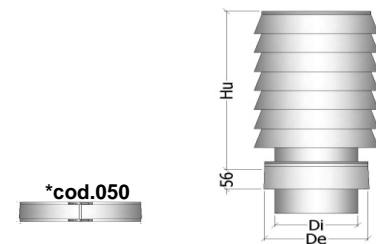


Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)			294	344	394	444	494	544	594								
A (mm)			260	280	310	330	380	430	480								

P <sub>65</sub> (kg)			(1,2)	(1,6)	(2,1)	(2,6)	(3,5)	(4,6)									
----------------------	--	--	-------	-------	-------	-------	-------	-------	--	--	--	--	--	--	--	--	--

## JI 091: STRAIGHT CHIMNEY SECTION (944mm)

Main component either of the chimney both of the connecting flue pipe



Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)	944	944	944	944	944	944	944	944	944	944	944	944	944	944	944	944	944


P <sub>91</sub> (kg)	(2,9)	(3,5)	(4,3)	(4,9)	(6,3)	(6,9)	(8,5)	(11,6)	(13,4)	(16,1)	(18,0)	(19,9)	(21,8)	(29,9)	(39,9)	(49,5)	(56,1)
----------------------	-------	-------	-------	-------	-------	-------	-------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------

# CONIX DUO - Dimensional Catalogue

## STRAIGHT ELEMENTS

### JH 091: STRAIGHT CHIMNEY SECTION (944mm)

Main component both of the chimney and of the connecting flue pipe




Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
H <sub>u</sub> (mm)								944	944	944	944	944	944	944	944	944	944
P <sub>91</sub> (kg)								(10,2)	(11,7)	(14,3)	(16,0)	(17,6)	(19,3)	(26,6)	(43,7)	(49,5)	(55,4)

## STRAIGHT ELEMENTS

### JI 093: STRAIGHT CHIMNEY SECTION (444mm)

Main component either of the chimney both of the connecting flue pipe




Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
H <sub>u</sub> (mm)	444	444	444	444	444	444	444	444	444	429	429	429	429	429	429	429	429
P <sub>93</sub> (kg)	(1,4)	(1,7)	(2,1)	(2,4)	(3,1)	(3,4)	(4,2)	(5,7)	(6,6)	(7,6)	(8,4)	(9,3)	(10,2)	(14,0)	(0,0)	(23,6)	(26,8)

## STRAIGHT ELEMENTS

### JH 093: STRAIGHT CHIMNEY SECTION (444-429mm)

Main component both of the chimney and of the connecting flue pipe

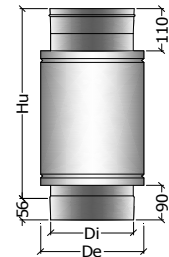


Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
H <sub>u</sub> (mm)								444	444	429	429	429	429	429	429	429	429
P <sub>93</sub> (kg)								(4,3)	(4,9)	(5,9)	(6,5)	(7,2)	(7,9)	(11,0)	(17,8)	(20,2)	(22,6)

## STRAIGHT ELEMENTS

### JI 194: STRAIGHT CHIMNEY SECTION (194mm)

Main component either of the chimney both of the connecting flue pipe




Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
H <sub>u</sub> (mm)	194	194	194	194	194	194	194	194	194	179	179	179	179	179	179	179	179
P <sub>94</sub> (kg)	(0,7)	(0,8)	(1,0)	(1,2)	(1,5)	(1,7)	(2,0)	(2,8)	(3,2)	(3,5)	(3,9)	(4,3)	(4,7)	(6,5)	(0,0)	(11,1)	(12,6)

# CONIX DUO - Dimensional Catalogue

## STRAIGHT ELEMENTS

### JH 094: STRAIGHT CHIMNEY SECTION (277-264mm)

Main component both of the chimney and of the connecting flue




Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
H <sub>u</sub> (mm)								277	277	264	264	264	264	264	264	264	264
P <sub>94</sub> (kg)								(2,3)	(2,7)	(3,2)	(3,5)	(3,9)	(4,3)	(6,0)	(9,5)	(10,8)	(12,1)

## STRAIGHT ELEMENTS

### JI 095: ADJUSTABLE ELEMENT

Element to compensate not standard length and to absorb the thermal wall expansion




Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
H <sub>u min</sub> (mm)	350	350	350	350	350	350	350	350	350	350	350	350	350	350			
H <sub>u max</sub> (mm)	550	550	550	550	550	550	550	550	550	550	550	550	550	550			
P <sub>95</sub> (kg)	(2,0)	(2,4)	(3,0)	(3,3)	(4,3)	(4,7)	(5,8)	(7,9)	(9,1)	(10,8)	(12,0)	(13,3)	(14,6)	(19,9)			

## STRAIGHT ELEMENTS

### JH 095: ADJUSTABLE ELEMENT

Element to compensate not standard length and to absorb the thermal wall expansion



Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
H <sub>u min</sub> (mm)								380	380	380	380	380	380	380	380	380	380
H <sub>u max</sub> (mm)								520	520	520	520	520	520	520	520	520	520
H <sub>OK a umido</sub> (W)								500	500	500	500	500	500	500	500	500	500
H <sub>OK T600</sub>								550	550	550	550	550	550	550	550	550	550
P <sub>95</sub> (kg)								(5,6)	(6,4)	(7,8)	(8,7)	(9,7)	(10,6)	(14,7)	(23,8)	(27,0)	(30,2)

## STRAIGHT ELEMENTS

### JI 050: LOCKING CLAMP

Element designed to be used when requested by the installation instruction to secure the joint mechanical stability




Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
H <sub>u</sub> (mm)	100	100	100	100	100	100	100	100	100	100	100	100	100	100	80	80	80
P <sub>50</sub> (kg)	(0,3)	(0,3)	(0,3)	(0,4)	(0,4)	(0,4)	(0,5)	(0,6)	(0,7)	(0,7)	(0,8)	(0,9)	(1,0)	(1,4)	(0,0)	(1,5)	(1,7)

# CONIX DUO - Dimensional Catalogue

## INSPECTION ELEMENTS

### JI 097: ELEMENT WITH HOLE FOR MEASUREMENT DEVICES

Element designed to draw of and analyse sample of smoke and to check the temperature




Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)	277	277	277	277	277	277	277	277	277	264	264	264	264	264	264	264	264
P <sub>97</sub> (kg)	(1,0)	(1,2)	(1,5)	(1,7)	(2,1)	(2,3)	(2,8)	(3,9)	(4,4)	(5,0)	(5,5)	(6,1)	(6,7)	(9,2)	(15,4)	(17,5)	(19,5)

## INSPECTION ELEMENTS

### JH 097: ELEMENT WITH HOLE FOR MEASUREMENT DEVICES

Element designed to draw of and analyse sample of flue and to check the temperature



Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)								329	329	329	329	329	329	329	329	329	329
P <sub>97</sub> (kg)								(2,9)	(3,4)	(4,2)	(4,7)	(5,2)	(5,7)	(8,0)	(14,7)	(16,6)	(18,6)

## INSPECTION ELEMENTS

### JI 098: INSPECTION ELEMENT WITH RECTANGULAR DOOR

Element provided with a rectangular door to inspect and clean the chimney




Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)			444	444	444	444	444	444	444								
P <sub>98</sub> (kg)			(2,8)	(3,0)	(4,0)	(4,3)	(5,0)	(6,6)	(7,5)								*SOLD OUT

## INSPECTION ELEMENTS

### JI 072: INSPECTION with PLUG "T600-H1-W"

Inspection element designed to work at temperature lower than




Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)			444	444	444	444	444	444	444	429	429	429	429	429	429	429	429
D <sub>F</sub> (mm)			100	100	130	130	130	150	150	180	180	180	180	180	180	180	180
P <sub>72</sub> (kg)			(2,7)	(3,0)	(3,9)	(4,3)	(5,0)	(6,7)	(7,5)	(8,8)	(9,7)	(10,5)	(11,4)	(15,3)	(0,0)	(24,1)	(26,5)

# CONIX DUO - Dimensional Catalogue

## INSPECTION ELEMENTS

### JI N98: INSPECTION with PLUG "T450-N1-D"

Inspection element designed to work at temperature up to 450°C, negative/ pressure and dry/wet condition




Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)	277	277	444	444	444	444	444	444	444	429	429	429	429	429	429	429	429
Df (mm)	80	100	130	150	180	200	200	200	200	200	200	200	200	200	200	200	200
PN98 (kg)	(1,4)	(1,7)	(2,8)	(3,2)	(4,1)	(4,5)	(5,3)	(6,9)	(7,7)	(8,7)	(9,6)	(10,5)	(11,4)	(15,2)	(0,0)	(24,8)	(27,9)

## INSPECTION ELEMENTS

### JI P98: INSPECTION with PLUG "T160-P1-W"

Inspection element designed to work at temperature up to 160°C, negative/positive pressure and dry/ wet condition




Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)	277	277	444	444	444	444	444	444	444	429	429	429	429	429	429	429	429
Df (mm)	80	100	130	150	180	200	200	200	200	200	200	200	200	200	200	200	200
PN98 (kg)	(1,4)	(1,7)	(2,8)	(3,2)	(4,1)	(4,5)	(5,3)	(6,9)	(7,7)	(9,1)	(10,0)	(11,0)	(11,9)	(16,0)	(0,0)	(24,8)	(27,9)

## INSPECTION ELEMENTS

### JH P98: INSPECTION with PLUG "T160-P1-W"

Inspection element designed to work at temperature up to 160°C, negative/positive pressure and dry/wet condition




Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)								494	494	494	494	494	494	494	494	494	494
Df (mm)								200	200	200	200	200	200	200	200	200	200
PN98 (kg)								(5,5)	(6,4)	(7,7)	(8,6)	(9,4)	(10,2)	(13,9)	(26,4)	(29,8)	(33,3)

## INSPECTION ELEMENTS

### JI N83: STARTING PLATE WITH ISPECTION (PLUG "T450-N1-D" )

Inspection element designed to work at temperature lower than 450°C, negative pressure and dry or wet condition




Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	750	850	950
Hu (mm)	300	320	350	370	400	420	420	420	420								
Df (mm)	80	100	130	150	180	200	200	200	200								
A (mm)	230	250	280	300	330	350	400	450	500								
B (mm)	150	160	175	185	200	210	210	210	210								
PN83 (kg)	(2,4)	(2,8)	(3,5)	(4,1)	(5,6)	(6,3)	(7,6)	(9,6)	(11,1)								

# CONIX DUO - Dimensional Catalogue

## JI P83: STARTING PLATE WITH INSPECTION (PLUG "T160-P1-W" )


Inspection element designed to work at temperature lower than 160°C, negative or positive pressure and dry or wet



Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	750	850	950
Hu (mm)	300	320	350	370	400	420	420	420	420								
DF (mm)	80	100	130	150	180	200	200	200	200								
A (mm)	230	250	280	300	330	350	400	450	500								
B (mm)	150	160	175	185	200	210	210	210	210								
P <sub>P83</sub> (kg)	(2,4)	(2,8)	(3,5)	(4,1)	(5,6)	(6,3)	(7,6)	(9,6)	(11,1)								

## JI 066: TEE REDUCED TO 80mm (female)


Element designed to connect the connecting flue pipe of gas-fired appliances "Type C", provided with seal



Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)	277	277	277	277	277	277	277	277									
H1 (mm)	167	167	167	167	167	167	167	167									
H2 (mm)	111	111	111	111	111	111	111	111									
A (mm)	110	120	135	145	160	170	195	220									
P <sub>66</sub> (kg)	(1,0)	(1,2)	(1,5)	(1,6)	(2,1)	(2,3)	(2,8)	(3,8)									

## JI 166: TEE REDUCED TO 80mm (DW)


Element with air intake designed to connect the double wall c.f.p. of gas-fired appliances "Type C"



Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)		277	277	277	277	277	277	277									
H1 (mm)		167	167	167	167	167	167	167									
H2 (mm)		111	111	111	111	111	111	111									
Au (mm)		94	109	119	134	144	169	194									
P <sub>166</sub> (kg)		(1,4)	(1,6)	(1,8)	(2,3)	(2,5)	(3,0)	(4,0)									

## JI 067: TEE WITH AIR INTAKE (60/100mm)

Element with air intake designed to connect the c.f.p. of gas-fired appliances "Type C", provided with seal




Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)			277	277	277	277	277	277									
H1 (mm)			167	167	167	167	167	167									
H2 (mm)			111	111	111	111	111	111									
A (mm)			115	125	140	150	175	200									
P <sub>67</sub> (kg)			(1,7)	(1,8)	(2,3)	(2,5)	(3,0)	(4,0)									

# CONIX DUO - Dimensional Catalogue

## JI 070: 90° TEE


Element designed to connect the connecting flue pipe to the chimney with an angle of 90°



Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)	277	277	444	444	444	444	444	494	544	694	744	794	844	894			
H1 (mm)	167	167	250	250	250	250	250	275	300	375	400	425	450	475			
H2 (mm)	111	111	194	194	194	194	194	219	244	319	344	369	394	419			
A (mm)	84	94	109	119	134	144	169	194	219	244	269	294	319	344			
P70 (kg)	(1,1)	(1,4)	(2,4)	(2,7)	(3,5)	(3,9)	(4,7)	(7,1)	(7,1)	(12,9)	(15,4)	(18,0)	(20,8)	(30,1)			

## JH 070: 90° TEE


Element designed to connect the connecting flue pipe to the chimney with an angle of 90°



Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)								494	544	694	744	794	844	894	1179	1179	1179
H1 (mm)								275	300	375	400	425	450	475	618	618	618
H2 (mm)								219	244	319	344	369	394	419	562	562	562
A (mm)								264	289	314	339	364	389	414	464	514	564
P70 (kg)								(7,4)	(9,3)	(16,3)	(19,5)	(22,9)	(26,7)	(39,1)	(85,8)	(99,3)	(113,4)

## JI 170: 87° TEE


Element designed to connect the connecting flue pipe to the chimney with an angle of 90°



Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)	277	277	444	444	444	444	444	494	544	694	744	794	844	894			
H1 (mm)	167	167	250	250	250	250	250	275	300	375	400	425	450	475			
H2 (mm)	111	111	194	194	194	194	194	219	244	319	344	369	394	419			
A (mm)	84	94	109	119	134	144	169	194	219	244	269	294	319	344			
P70 (kg)	(1,1)	(1,4)	(2,4)	(2,7)	(3,5)	(3,9)	(4,7)	(7,1)	(7,1)	(12,9)	(15,4)	(18,0)	(20,8)	(30,1)			

## JH 170: 87° TEE

Element designed to connect the connecting flue pipe to the chimney with an angle of 87°




Di (mm)	300	350	400	450	500	550	600	700	800	900
De (mm)	350	400	450	500	550	600	650	800	900	1000
Hu (mm)	494	544	694	744	794	844	894	1179	1179	1179
H1 (mm)	282	307	382	407	432	457	482	625	625	625
H2 (mm)	212	237	312	337	362	387	412	555	555	555
A (mm)	275	300	325	350	375	400	425	500	550	600
P170 (kg)	(7,1)	(9,0)	(16,4)	(19,6)	(23,0)	(26,8)	(39,3)	(86,2)	(99,8)	(113,9)

# CONIX DUO - Dimensional Catalogue

## JI N71: 45° TEE


Element designed to connect the connecting flue pipe to the chimney with an angle of 45°  
It's suitable to work with temperature up to 450°C, negative or positive pressure and with wet or dry flue



Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)			444	444	444	494	544	644	694	794	844	944					
A (mm)			185	202	227	245	287	330	373	415	458	501					
B (mm)			317	313	306	352	392	482	521	611	650	740					
C (mm)			261	285	322	346	406	466	527	587	648	708					
D (mm)			132	111	79	108	105	152	149	196	193	240					
E (mm)			127	131	138	142	152	162	173	183	194	204					
P <sub>N71</sub>			(2,4)	(2,8)	(3,5)	(3,9)	(4,7)	(7,1)	(9,0)	(16,4)	(19,6)	(23,0)					

## JI P71: 45° TEE


Element designed to connect the connecting flue pipe to the chimney with an angle of 45°  
It's suitable to work with temperature up to 160°C, negative or positive pressure and with wet or dry flue



Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)			444	444	444	494	544	644	694	794	844	944					
A (mm)			185	202	227	245	287	330	373	415	458	501					
B (mm)			317	313	306	352	392	482	521	611	650	740					
C (mm)			261	285	322	346	406	466	527	587	648	708					
D (mm)			132	111	79	108	105	152	149	196	193	240					
E (mm)			127	131	138	142	152	162	173	183	194	204					
P <sub>P71</sub>			(2,4)	(2,8)	(3,5)	(3,9)	(4,7)	(7,1)	(9,0)	(16,4)	(19,6)	(23,0)					

## JI 179: 3° ELBOW


Two segments elbow for 3° displacement from the chimney axis



Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
A (mm)	51	51	51	52	52	52	53	54	54	55	56	56	57	58			
A <sub>1</sub> (mm)	72	72	72	73	73	73	74	75	75	76	77	77	78	79			
B (mm)	4	4	4	4	4	4	4	4	4	4	4	4	4	4			
C (mm)	122	123	124	124	125	125	127	128	129	131	132	133	135	136			
P <sub>79</sub> (kg)	(0,5)	(0,6)	(0,7)	(0,8)	(1,1)	(1,2)	(1,5)	(2,1)	(2,4)	(2,7)	(3,1)	(3,4)	(3,8)	(5,3)			

## JH 179: 3° ELBOW

Two segments elbow for 3° displacement from the chimney axis




Di (mm)	300	350	400	450	500	550	600	700	800	900
De (mm)	350	400	450	500	550	600	650	800	900	1000
A (mm)	129	130	130	131	132	132	133	144	145	147
A <sub>1</sub> (mm)	200	201	201	202	203	203	204	215	216	218
B (mm)	10	10	11	11	11	11	11	11	11	11
C (mm)	329	330	331	333	334	335	336	359	362	364
P <sub>79</sub> (kg)	(3,0)	(3,5)	(4,0)	(4,5)	(5,0)	(5,5)	(7,7)	(16,3)	(18,7)	(21,1)

# CONIX DUO - Dimensional Catalogue

## JI 073: 15° ELBOW


Two segments elbow for 15° displacement from the chimney axis



Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
A (mm)			61	62	64	65	69	72	75	74	77	80	83	87			
A <sub>1</sub> (mm)			82	83	85	86	90	93	96	115	118	121	124	128			
B (mm)			21	22	22	22	23	24	25	30	31	31	32	33			
C (mm)			140	142	146	149	155	162	168	184	191	197	204	210			
P <sub>73</sub> (kg)			(0,8)	(0,9)	(1,3)	(1,4)	(1,8)	(2,5)	(3,0)	(3,8)	(4,4)	(4,9)	(5,5)	(7,8)			

## JH 073: 15° ELBOW


Two segments elbow for 15° displacement from the chimney axis



Di (mm)	300	350	400	450	500	550	600	700	800	900
De (mm)	350	400	450	500	550	600	650	800	900	1000
A (mm)	162	165	153	157	160	163	166			
A <sub>1</sub> (mm)	203	206	224	228	231	234	237			
B (mm)	52	53	58	59	60	61	61			
C (mm)	358	364	370	376	383	389	396			
P <sub>73</sub> (kg)	(3,4)	(4,0)	(5,1)	(5,8)	(6,6)	(7,4)	(10,4)	(21,6)	(25,2)	(29,6)

## JI 074: 30° ELBOW


Two segments elbow for 30° displacement from the chimney axis



Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
A (mm)	66	69	73	76	80	82	89	96	103	119	126	133	139	146			
A <sub>1</sub> (mm)	87	90	94	97	101	103	110	117	124	145	152	159	165	172			
B (mm)	44	45	47	48	50	52	55	58	62	73	76	79	83	86			
C (mm)	142	147	155	160	167	172	185	197	210	245	258	270	283	295			
P <sub>74</sub> (kg)	(0,6)	(0,7)	(0,9)	(1,1)	(1,5)	(1,6)	(2,1)	(3,1)	(3,7)	(5,1)	(5,9)	(6,8)	(7,7)	(11,1)			

## JH 074: 30° ELBOW

Two segments elbow for 30° displacement from the chimney axis





Di (mm)	300	350	400	450	500	550	600	700	800	900
De (mm)	350	400	450	500	550	600	650	800	900	1000
A (mm)	184	191	185	191	198	205	211	225	238	252
A <sub>1</sub> (mm)	226	233	256	262	269	276	282	296	309	323
B (mm)	113	116	128	131	134	138	141	148	155	161
C (mm)	380	393	406	418	431	443	456	481	506	531
P <sub>74</sub> (kg)	(4,0)	(4,8)	(6,1)	(7,1)	(8,1)	(9,2)	(13,1)	(27,1)	(32,2)	(37,7)

# CONIX DUO - Dimensional Catalogue

## JI 042: 42° ELBOW



Two segments elbow for 42° displacement from the chimney axis



	CURVA A 2 SETTORI									CURVA A 3 SETTORI							
Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
A (mm)	74	78	84	87	93	97	107	116	126	178	187	197	207	216			
A <sub>1</sub> (mm)	95	99	105	108	114	118	128	137	147	204	214	223	233	243			
B (mm)	64	66	70	73	76	79	85	92	98	137	143	150	156	162			
C (mm)	145	151	161	168	178	185	201	218	235	330	346	363	380	396			
P <sub>42</sub> (kg)	(0,6)	(0,8)	(1,0)	(1,2)	(1,6)	(1,8)	(2,4)	(3,5)	(4,3)	(6,8)	(7,9)	(9,2)	(10,5)	(14,9)			

## JH 042: 42° ELBOW



Two segments elbow for 42° displacement from the chimney axis



	2 SETTORI		CURVA A 3 SETTORI									
Di (mm)	300	350	400	450	500	550	600	700	800	900		
De (mm)	350	400	450	500	550	600	650	800	900	1000		
A (mm)	152	161	195	205	214	224	234	253	272	291		
A <sub>1</sub> (mm)	223	232	269	279	288	298	307	326	346	365		
B (mm)	149	155	180	186	193	199	206	218	231	244		
C (mm)	317	334	395	412	429	445	462	495	529	562		
P <sub>42</sub> (kg)	(4,4)	(5,4)	(6,6)	(7,8)	(9,0)	(10,3)	(14,8)	(30,7)	(37,0)	(43,8)		

## JI 075: 45° ELBOW



Two segments elbow for 45° displacement from the chimney axis



	CURVA A 2 SETTORI										CURVA A 3 SETTORI							
Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900	
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000	
A (mm)	76	75	81	85	92	96	106	116	127	185	195	205	216	226				
A <sub>1</sub> (mm)	97	101	107	111	118	122	132	142	153	211	221	231	242	252				
B (mm)	69	71	76	79	83	86	93	101	108	149	156	164	171	178				
C (mm)	144	147	157	164	175	182	200	217	235	334	351	369	387	404				
P <sub>75</sub> (kg)	(0,7)	(0,8)	(1,1)	(1,2)	(1,7)	(1,9)	(2,5)	(3,7)	(4,5)	(7,3)	(8,6)	(9,9)	(11,2)	(16,1)				

## JH 075: 45° ELBOW

Two segments elbow for 45° displacement from the chimney axis




	2 SETTORI		CURVA A 3 SETTORI									
Di (mm)	300	350	400	450	500	550	600	700	800	900		
De (mm)	350	400	450	500	550	600	650	800	900	1000		
A (mm)	157	167	202	212	222	233	243	264	284	305		
A <sub>1</sub> (mm)	228	238	275	286	296	306	317	337	358	379		
B (mm)	161	168	195	202	209	217	224	239	253	268		
C (mm)	318	336	396	414	432	449	467	502	538	573		
P <sub>75</sub> (kg)	(4,6)	(5,3)	(6,9)	(8,0)	(9,3)	(10,7)	(15,4)	(31,9)	(38,6)	(45,8)		

# CONIX DUO - Dimensional Catalogue

## JI 077: CONDENSATE DRAIN

Element designed to collect and drain off any condensate or rain water, through the nipple




Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)	130	130	130	130	130	130	130	130	130	130	130	130	130	130			

P <sub>77</sub> (kg)	(0,4)	(0,5)	(0,7)	(0,8)	(1,1)	(1,2)	(1,7)	(2,3)	(2,8)	(3,5)	(4,2)	(4,8)	(5,6)	(7,0)			
----------------------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	--	--	--

## JH 077: CONDENSATE DRAIN

Element designed to collect and drain off any condensate or rain water, through the nipple




Di (mm)	300	350	400	450	500	550	600	700	800	900
De (mm)	350	400	450	500	550	600	650	800	900	1000
Hu (mm)	210	210	210	210	210	210	210	210	210	210

P <sub>77</sub> (kg)	(1,6)	(1,8)	(2,3)	(2,6)	(2,8)	(3,1)	(4,3)	(21,3)	(26,3)	(31,8)
----------------------	-------	-------	-------	-------	-------	-------	-------	--------	--------	--------

## JI 180: STARTING PLATE WITH DRAIN

Starting element of the chimney, provided with lateral condensate drain




Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)	162	162	162	162	162	162	162	162	162	162	162	162	162	162	165	165	165
A (mm)	230	250	280	300	330	350	400	450	500	550	600	650	700	750	900	1000	1100

P <sub>180</sub> (kg)	(1,2)	(1,4)	(1,7)	(1,9)	(2,7)	(3,0)	(3,7)	(4,7)	(5,5)	(6,5)	(7,4)	(8,3)	(10,4)	(12,6)	(0,0)	(16,5)	(18,1)
-----------------------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	--------	--------	-------	--------	--------

## JI 081: MIDDLE PLATE TO JOINT WJI (F) - WKI (M)

Element to support the vertical part of the chimney and to connect parts of single - double wall chimneys




Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)	139	139	139	139	139	139	139	139	139	139	139	139	139	139			
H <sub>1</sub> (mm)	97	97	97	97	97	97	97	97	97	97	97	97	97	97			
H <sub>2</sub> (mm)	42	42	42	42	42	42	42	42	42	42	42	42	42	42			
A (mm)	230	250	280	300	330	350	400	450	500	550	600	650	700	750			

P <sub>81</sub> (kg)	(0,9)	(1,1)	(1,3)	(1,5)	(2,1)	(2,3)	(2,8)	(3,6)	(4,2)	(5,0)	(5,6)	(6,3)	(8,0)	(9,7)			
----------------------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	--	--	--

# CONIX DUO - Dimensional Catalogue

## JI 082: MIDDLE PLATE

Element to support the vertical part of the chimney and to divide the vertical load due to the weight of the chimney




Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)	139	139	139	139	139	139	139	139	139	139	139	139	139	139			
H1 (mm)	97	97	97	97	97	97	97	97	97	97	97	97	97	97			
H2 (mm)	42	42	42	42	42	42	42	42	42	42	42	42	42	42			
A (mm)	230	250	280	300	330	350	400	450	500	550	600	650	700	750			

P <sub>82</sub> (kg)	(1,1)	(1,3)	(1,6)	(1,8)	(2,5)	(2,7)	(3,3)	(4,2)	(4,9)	(5,6)	(6,3)	(7,1)	(8,8)	(10,8)			
----------------------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	--------	--	--	--

## JH 082-V: MIDDLE PLATE WJH-->WJI

Element to support the vertical part of the chimney and to divide the vertical load due to the weight of the chimney




Di (mm)	300	350	400	450	500	550	600	700	800	900
De (mm)	350	400	450	500	550	600	650	800	900	1000
Hu (mm)	224	224	224	224	224	224	224	224	224	224
H1 (mm)	97	97	97	97	97	97	97	97	97	97
H2 (mm)	127	127	127	127	127	127	127	127	127	127
A (mm)	450	500	550	600	650	700	750	850	950	1050

P <sub>82-v</sub> (kg)	(4,7)	(5,5)	(6,5)	(7,3)	(8,2)	(10,0)	(12,5)	(21,4)	(24,6)	(27,9)
------------------------	-------	-------	-------	-------	-------	--------	--------	--------	--------	--------

## JH 082-O: MIDDLE PLATE

Element to support the vertical part of the chimney and to divide the vertical load due to the weight of the chimney




Di (mm)	300	350	400	450	500	550	600	700	800	900
De (mm)	350	400	450	500	550	600	650	800	900	1000
Hu (mm)	267	267	267	267	267	267	267	267	267	267
H1 (mm)	174	174	174	174	174	174	174	174	174	174
H2 (mm)	93	93	93	93	93	93	93	93	93	93
A (mm)	450	500	550	600	650	700	750	850	950	1050

P <sub>82-o</sub> (kg)	(4,4)	(5,1)	(6,1)	(6,9)	(7,7)	(9,5)	(11,9)	(20,2)	(23,2)	(26,4)
------------------------	-------	-------	-------	-------	-------	-------	--------	--------	--------	--------

## JI 025: JOINT ELEMENT TO 80mm (sleeve)

Element designed to connect the connecting flue pipe and the




Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)		180	180	180	180	180	180	180									
Dr (mm)		80	80	80	80	80	80	80									

P <sub>25</sub> (kg)	(0,5)	(0,6)	(0,7)	(0,9)	(1,0)	(1,1)	(1,4)										
----------------------	-------	-------	-------	-------	-------	-------	-------	--	--	--	--	--	--	--	--	--	--

# CONIX DUO - Dimensional Catalogue

## JI 026: JOINT ELEMENT TO 100mm (sleeve)


Element designed to connect the connecting flue pipe and the appliance



Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
H <sub>U</sub> (mm)			180	180	180	180	180	180									
D <sub>r</sub> (mm)			100	100	100	100	100	100									
P <sub>26</sub> (kg)			(0,6)	(0,7)	(0,9)	(1,0)	(1,1)	(1,4)									

## JI 029: WKI (F) - WJI (M) JOINT ELEMENT


Element designed to connect parts of single - double wall connecting flue pipes



Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
H <sub>U</sub> (mm)	139	139	139	139	139	139	139	139	139	139	139	139	139	139			
P <sub>29</sub> (kg)	(0,4)	(0,5)	(0,6)	(0,7)	(0,8)	(0,9)	(1,1)	(1,6)	(1,8)	(2,3)	(2,6)	(2,8)	(3,1)	(4,4)			

## JH 029: WKI (F) - WJI (M) JOINT ELEMENT


Element designed to connect parts of single - double wall connecting flue pipes



Di (mm)		300	350	400	450	500	550	600	700	800	900
De (mm)		350	400	450	500	550	600	650	800	900	1000
H <sub>U</sub> (mm)		264	264	264	264	264	264	264	264	264	264
P <sub>29</sub> (kg)		(2,4)	(2,7)	(3,5)	(3,9)	(4,3)	(4,7)	(6,5)	(10,6)	(12,1)	(13,5)

## JI 030: GIUNTO DI RACCORDO WJI (F) - WKI (M) / WJI (F) - WKI (M) JOINT ELEMENT

Element designed to connect parts of single - double wall connecting flue pipes




Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
H <sub>U</sub> (mm)	139	139	139	139	139	139	139	139	139	139	139	139	139	139			
P <sub>30</sub> (kg)	(0,4)	(0,5)	(0,7)	(0,7)	(0,9)	(1,0)	(1,3)	(1,7)	(2,0)	(2,5)	(2,8)	(3,0)	(3,3)	(4,5)			

# CONIX DUO - Dimensional Catalogue

## JH 030:WJI (F) - WKI (M) JOINT ELEMENT

Element designed to connect parts of single - double wall connecting flue pipes




Di (mm)	300	350	400	450	500	550	600	700	800	900
De (mm)	350	400	450	500	550	600	650	800	900	1000
Hu (mm)	264	264	264	264	264	264	264	264	264	264

P <sub>30</sub> (kg)	(2,4)	(2,7)	(3,5)	(3,9)	(4,3)	(4,7)	(6,5)	(10,6)	(12,1)	(13,5)
----------------------	-------	-------	-------	-------	-------	-------	-------	--------	--------	--------

## JI 096: TAPERED JOINT D<sub>f</sub>(female)-D<sub>r</sub>(male)

Element designed to connect part of chimneys or of connecting flue pipes that have different dimensions




Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)				184	184	184	184	184	184	184	184	184	184	184			
D <sub>ri</sub> (mm)				130	150	180	200	250	300	350	400	450	500	550			
D <sub>re</sub> (mm)				180	200	230	250	300	350	400	450	500	550	600			

P <sub>96</sub> (kg)			(1,1)	(1,4)	(1,6)	(1,8)	(2,5)	(3,0)	(3,4)	(3,8)	(4,1)	(4,5)	(4,9)				
----------------------	--	--	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	--	--	--	--

## JH 096: TAPERED JOINT D<sub>f</sub>(female)-D<sub>r</sub>(male)

Element designed to connect part of chimneys or of connecting flue pipes that have different dimensions




Di (mm)	300	350	400	450	500	550	600	700	800	900
De (mm)	350	400	450	500	550	600	650	800	900	1000
Hu (mm)	369	369	369	369	369	369	369	394	394	394
D <sub>ri</sub> (mm)	250	300	350	400	450	500	550	600	700	800
D <sub>re</sub> (mm)	300	350	400	450	500	550	600	650	800	900

P <sub>96</sub> (kg)	(3,7)	(4,3)	(5,3)	(6,0)	(6,6)	(7,3)	(10,1)	(16,2)	(18,4)	(20,6)
----------------------	-------	-------	-------	-------	-------	-------	--------	--------	--------	--------

## JI 013: ELEMENT WITH CONDENSATE DRAIN

Element designed to drain off any condensate in the connecting flue pipe, through the nipple




Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
Hu (mm)			140	140	140	140	140	140	140								

P <sub>13</sub> (kg)			(1,0)	(1,2)	(1,5)	(1,6)	(2,0)	(2,8)	(3,2)								
----------------------	--	--	-------	-------	-------	-------	-------	-------	-------	--	--	--	--	--	--	--	--

# CONIX DUO - Dimensional Catalogue

## JH 013: ELEMENT WITH CONDENSATE DRAIN


Element designed to drain off any condensate in the connecting flue pipe, through the nipple

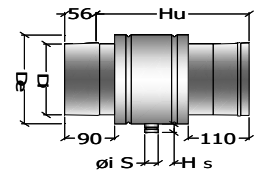

<b>Di (mm)</b>	<b>300</b>	<b>350</b>	<b>400</b>	<b>450</b>	<b>500</b>	<b>550</b>	<b>600</b>	<b>700</b>	<b>800</b>	<b>900</b>
<b>De (mm)</b>	350	400	450	500	550	600	650	800	900	1000
<b>H<sub>u</sub> (mm)</b>	277	277	344	344	344	344	344	344	344	344
<b>H<sub>s</sub> (mm)</b>	20	20	145	145	145	145	145	145	145	145
<b>ø<sub>s</sub> (mm)</b>	3/4gas	3/4gas	3/4gas	3/4gas	3/4gas	3/4gas	3/4gas	3/4gas	3/4gas	3/4gas
<b>P<sub>13</sub> (kg)</b>	(2,4)	(2,8)	(3,9)	(4,4)	(4,8)	(5,3)	(7,4)	(11,7)	(13,3)	(14,9)

## JI 019: PRESSURE EQUALISING OPENING


Element designed to adjust the draught of a multi-inlet chimney, increasing the mass flow with the air



<b>Di (mm)</b>	<b>80</b>	<b>100</b>	<b>130</b>	<b>150</b>	<b>180</b>	<b>200</b>	<b>250</b>	<b>300</b>	<b>350</b>	<b>400</b>	<b>450</b>	<b>500</b>	<b>550</b>	<b>600</b>	<b>700</b>	<b>800</b>	<b>900</b>
<b>De (mm)</b>	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
<b>H<sub>u</sub> (mm)</b>			444	444	444	444	444	444									
<b>P<sub>19</sub> (kg)</b>			(2,4)	(2,7)	(3,5)	(3,7)	(4,5)	(6,0)									

## JI 033: PLUG FOR CASCADE ARRANGEMENT


Element designed to close the c.f.p. connecting more than one appliance (cascade arrangement)



<b>Di (mm)</b>	<b>80</b>	<b>100</b>	<b>130</b>	<b>150</b>	<b>180</b>	<b>200</b>	<b>250</b>	<b>300</b>	<b>350</b>	<b>400</b>	<b>450</b>	<b>500</b>	<b>550</b>	<b>600</b>	<b>700</b>	<b>800</b>	<b>900</b>
<b>De (mm)</b>	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
<b>H<sub>u</sub> (mm)</b>	100	100	100	100	100	100	100	100	100								
<b>P<sub>33</sub> (kg)</b>	(0,3)	(0,4)	(0,5)	(0,6)	(0,8)	(0,9)	(1,1)	(1,5)	(1,9)								

## JH 090: CONVERTER WJI-->WJH

Switching element from WJI to WJH




<b>Di (mm)</b>	<b>300</b>	<b>350</b>	<b>400</b>	<b>450</b>	<b>500</b>	<b>550</b>	<b>600</b>	<b>700</b>	<b>800</b>	<b>900</b>
<b>De (mm)</b>	350	400	450	500	550	600	650	800	900	1000
<b>H<sub>u</sub> (mm)</b>	154	154	154	154	154	154	154	154	154	154
<b>P<sub>90</sub> (kg)</b>	(1,6)	(1,8)	(2,3)	(2,6)	(2,8)	(3,1)	(4,3)	(6,9)	(7,9)	(8,8)

# CONIX DUO - Dimensional Catalogue

## PARTICULAR ELEMENTS

### JH86: SILENCER (15dB)

Element useful to reduce the noise of appliance of big power




Di (mm)	80	100	130	150	180	200	250	300	350	400	450	500	550	600	700	800	900
De (mm)	130	150	180	200	230	250	300	350	400	450	500	550	600	650	800	900	1000
H <sub>u</sub> (mm)	520	520	520	520	700	700	700	700	660	880	-	1060	-	1240	-	-	-
A (mm)	250	250	250	300	450	450	500	500	600	700	-	800	-	1000	-	-	-

## PARTICULAR ELEMENTS

### JH85: EXPANSION BELLOWS


Element useful to compensate the thermic dilatation in case of big power appliance




Di (mm)	300	350	400	450	500	550	600	700	800	900
De (mm)	350	400	450	500	550	600	650	-	-	-
H <sub>u</sub> (mm)	570	570	570	490	490	490	490	-	-	-
CORS/(mm)	170	170	170	170	170	170	170	-	-	-

P85 (kg)	(9,5)	(10,7)	(12,2)	(13,6)	(15,0)	(16,7)	(18,2)
----------	-------	--------	--------	--------	--------	--------	--------

## DISPLACEMENT WITH JOINT TYPE H (JH)



Di (mm)	300	350	400	450	500	550	600	700	800	900
De (mm)	350	400	450	500	550	600	650	800	900	1000
A (mm)	157	167	205	215	226	236	246	277	298	318
A1 (mm)	228	238	276	286	297	307	317	348	369	389
E (mm)	500	525	616	641	666	691	716	790	840	890
F (mm)	429	454	545	570	595	620	645	719	769	819



Di (mm)	300	350	400	450	500	550	600	700	800	900
De (mm)	350	400	450	500	550	600	650	800	900	1000
75-A (mm)	157	167	205	215	226	236	246	277	298	318
75-A1 (mm)	228	238	276	286	297	307	317	348	369	389
42-A (mm)	152	161	203	212	222	232	241	269	289	308
42-A1 (mm)	223	232	274	283	293	303	312	340	360	379
E (mm)	491	515	612	636	660	683	707	777	824	872
F (mm)	425	450	543	568	592	617	641	713	762	811